




# CTL60

## LINEAR RED

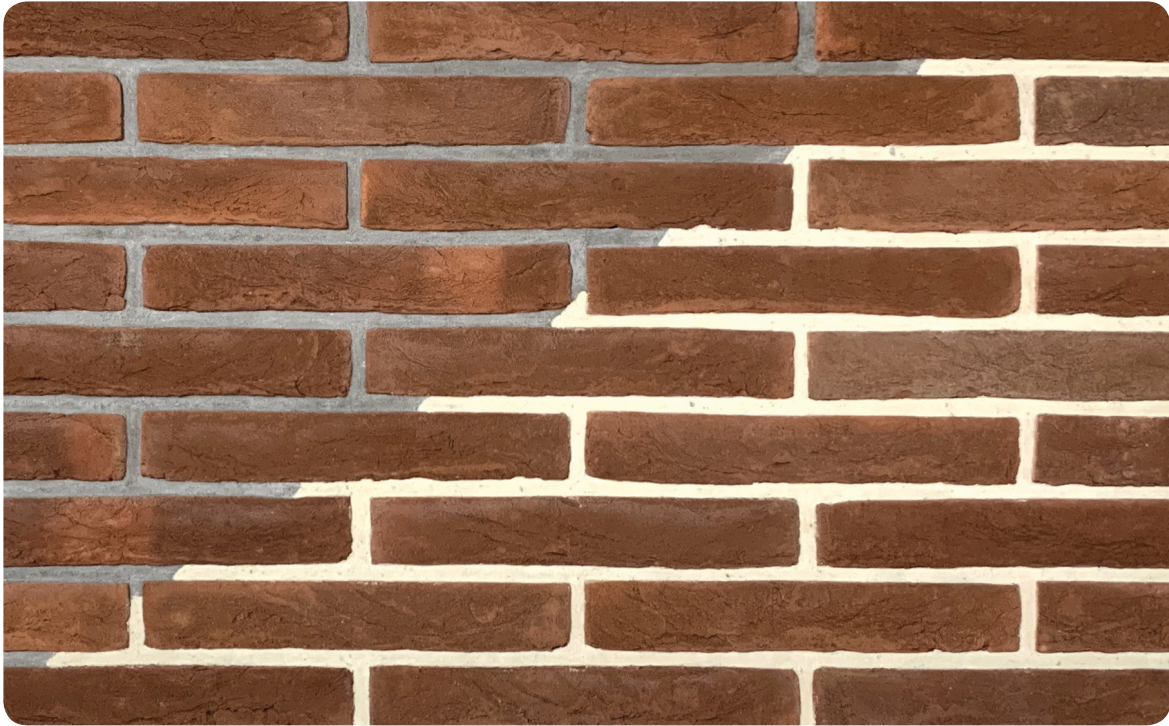

L 327 H 50 T 25 MM

**Corner Consumption:**

Per Running  
Sq. Ft. - 5 pcs.

**\*Specifications:**

Weight: 1 Kg  
Water absorption: < 18%

**Coverage per sq.ft. (10mm joint):**

1 sq. ft. - 4.6 pcs.  
1 m2 - 49.5 pcs.

*\*Specifications are indicative, buyers are requested to undertake tests in accredited laboratories to verify suitability of bricks for particular application.*

*\*\*Individual bricks may vary dimensionally this is natural characteristic of fired clay products and is catered for in relevant Indian Standard.*

*\*\*\*Dimensions are subject to change without prior notice, before ordering/designing buyers are encouraged to inquire about prevailing sizes and quantities available.*